


Cold Planer



Highly versatile Cold Planers are adaptable to a wide variety of job environments including road repair, bridge deck repair, landscaping, municipal, shopping center and utility work. The Cold Planer is easy to maneuver around manhole and storm drains; excellent for bridge decks where heavier, dedicated planers are not allowed. Hydraulic side-shift and depth control allows skid steer operators to shift it up to 24" for maneuvering close to buildings and other obstacles from the comfort of your seat.

HYDRAULIC SIDE-SHIFT AND DEPTH TILT CONTROLS

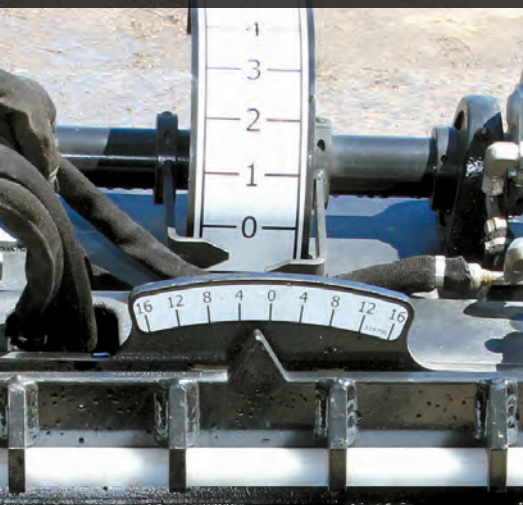

CUTTING DEPTH IS 0" TO 6"




CUT ASPHALT AND CONCRETE WITH CARBIDE TEETH





Take a Picture of This QR Code With Your Smart Phone to See it in Action

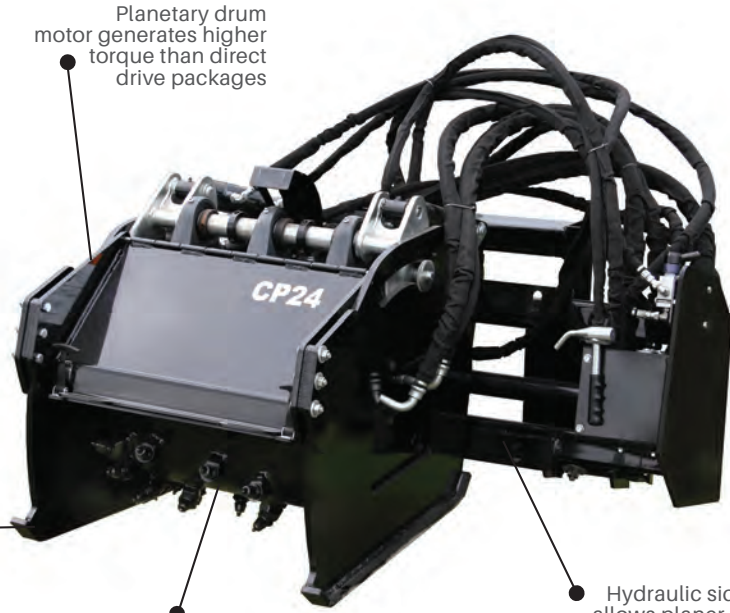

Planetary drum motor generates higher torque than direct drive packages

Right & left side skid shoes can be controlled independently for uneven terrain

Solid drum design creates fine, recyclable aggregate — material moves to rear of drum to prevent re-milling of material

Hydraulic side-shift allows planer to shift up to 24" to the right for cuts close to the curbs

SKID STEER

FEATURES & BENEFITS

- Adjustable to a wide variety of job environments including road construction, landscaping, bridge deck repair, municipal, shopping center, and utility work
- Two tools in one; cut asphalt and concrete with the same machine
- Easy to maneuver around manholes and storm drains; excellent for bridge decks where heavier dedicated planers are not allowed
- Side-shift feature moves planer from left to right for maximum maneuverability

SPECIFICATIONS / OPTIONS

Model	CP18	CP24	CP36	CP48
Part Number	900938	900939	901430	901431
Depth of Cut	0-6"	0-6"	0-6"	0-6"
Width of Cut	18"	24"	36"	48"
Number of Teeth	48	60	78	90
Standard Side-Shift	24" Hydraulic	24" Hydraulic	24" Hydraulic	24" Hydraulic
Tilt	16°	16°	8°	8°
Hydraulic Requirement	22-56 GPM; 2,800-6,525 psi	25-56 GPM; 3,000-6,525 psi	25-112 GPM; 3,000-6,525 psi	25-112 GPM; 3,000-6,525 psi
Weight	1,675 lb.	1,825 lb.	2,625 lb.	2,825 lb.

Options

Bolt-On Rollers
Pistol Grip Control Harness
Loader Specific Wire Harness
Case Drain Coupler Required
Factory Installed Couplers
Factory Installed High Flow Couplers

* For more specification details please see our website www.erskineattachments.com

* For more specification details please see our website www.erskineattachments.com