


Heavy-Duty Rock Saw






Construction & Concrete Attachments

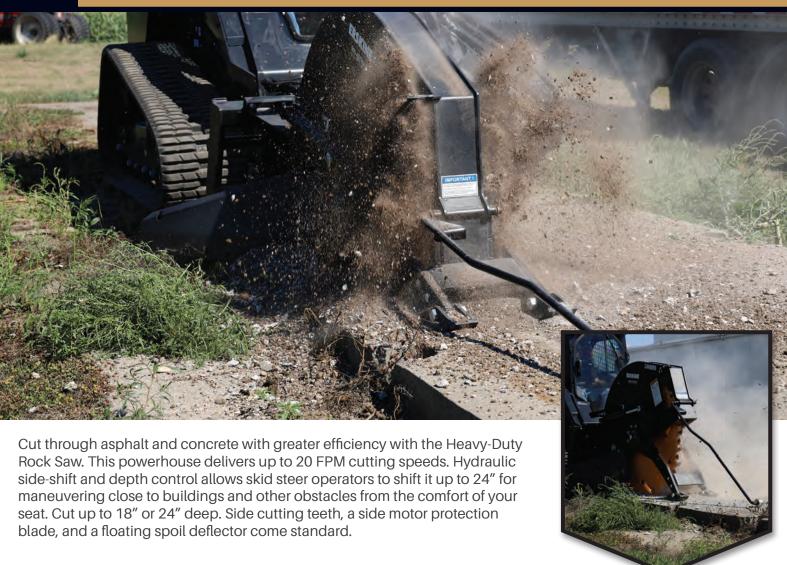



Take a Picture of This QR Code With Your Smart Phone to See it in Action



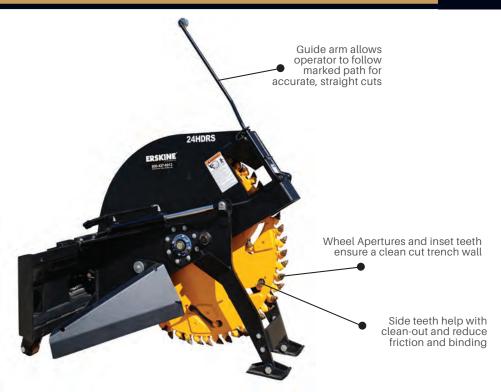

FEATURES & BENEFITS

- Highly visible depth gauge allows for more precise control over cutting depth
- Large spindle & support bearing improves cutting effciency by stabilizing the cutter head
- Side cutter head teeth minimize any cutter head binding while cutting full depth trenches
- Dual depth control legs improve stability while cutting
- New motor & gearbox provides 33% more available torque than the standard Rock Saw
- Our universal quick attach plates fit most skid steers

SPECIFICATIONS / OPTIONS

Model	18HDRS	24HDRS
Part Number	901306	901307
Minimum Flow Rate	25 GPM	25 GPM
Maximum Flow Rate	60 GPM	60 GPM
Maximum Speed	130 RPM	130 RPM
Minimum Operating Pressure	2,200 psi	2,200 psi
Maximum Pressure	4,800 psi	4,800 psi
Maximum Power Output	80 HP	80 HP
Maximum Torque	6,640 lb-ft	6,640 lb-ft
Hydraulic Flow Classification	High Flow	High Flow
Number of Teeth	54	72
Width of Cut	2.75"	2.75"
Depth of Cut	18"	24"
Depth Control	Hydraulic	Hydraulic
Side-Shift Distance	24"	24"
Side-Shift Control	Hydraulic	Hydraulic
Overall Width	66.5"	66.5"
Overall Length	69.5"	76.2"
Overall Height	53"	64"
Weight	2,700 lb.	3,300 lb.
Cutting Speed	Up to 20 FPM	Up to 20 FPM

Options

Pistol Grip Control Harness	
Loader Specific Wire Harness	
Case Drain Required	
Factory Installed Case Drain Coupler	
Factory Installed Couplers	
Factory Installed High Flow Couplers	

^{*} For more specification details please see our website www.erskineattachments.com

