

# Heavy-Duty Trencher



Professional applications require the performance of our Heavy-Duty Trencher. Built for the demands of rigorous trenching jobs, this unit outperforms because of its strength and durability. Avoid costly downtime and project delays by selecting the right tool for the job!



AUGER PUSHES DIRT ASIDE TO  
CREATE A FINISHED TRENCH



HEAVY-DUTY PLANETARY DRIVE SYSTEM




TEETH OPTIONS INCLUDE DOUBLE  
CUP, BULLET AND SCORPION





Take a Picture of This QR Code With  
Your Smart Phone to See it in Action

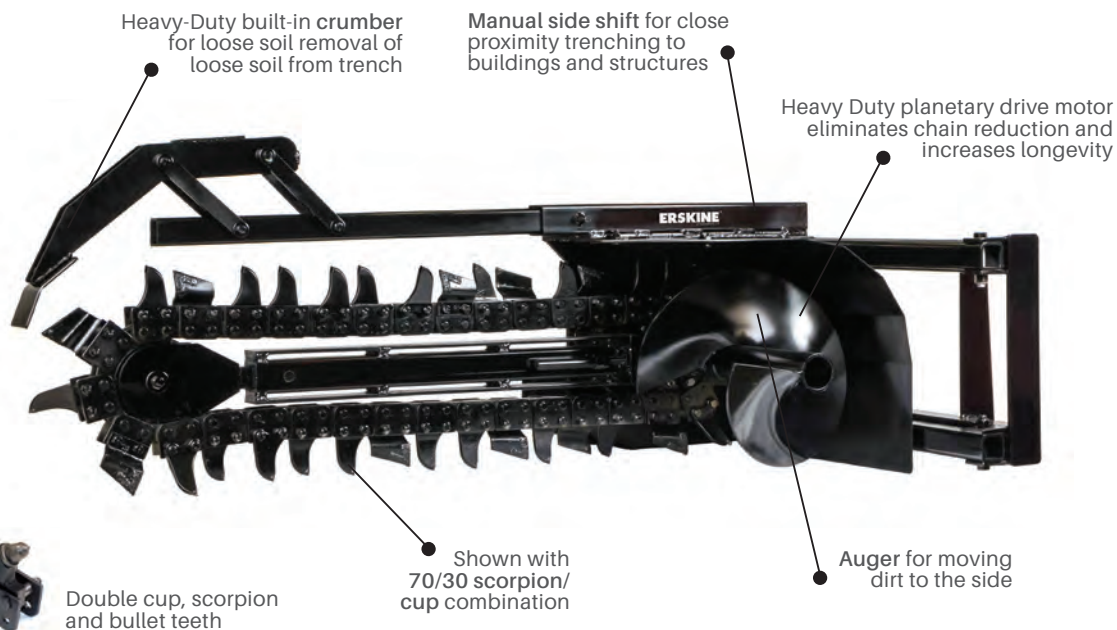

SKID STEER

## FEATURES & BENEFITS

- Manual side-shift comes standard
- Powerful hydraulic motor
- No case drain required
- Heavy-duty planetary drive system eliminates chain reduction
- Replaceable spoil auger
- Built-in skid shoe for auger depth control

## SPECIFICATIONS / OPTIONS

Model	TX150	TX250	TX350
Rated Flow	15-20 GPM	20-30 GPM	30-45 GPM
Maximum Trench Depth	4'	4'	5'
Trench Width	12"	12"	12"
Shaft Speed	116-146 RPM	120-170 RPM	155-202 RPM
Operating psi	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 psi
Output Torque	995-1,393 ft-lb	1,219-1,706 ft-lb	1,480-2,072 ft-lb
Chain Station Counts 3'	27	27	27
Chain Station Counts 4'	33	33	33
Chain Station Counts 5'	N/A	N/A	39
Side-Shift	Manual	Manual	Manual
Weight (3' / 6" Double Cup)	1,095 lb.	1,105 lb.	1,195 lb.
Weight (4' / 6" Double Cup)	1,160 lb.	1,170 lb.	1,270 lb.
<b>Options</b>			
Factory Installed Couplers			
High Flow Couplers	N/A	N/A	

\* For more specification details please see our website [www.erskineattachments.com](http://www.erskineattachments.com)

Model	GPM Range	Trench Width	Max Recommended Trench Depth	Application
T100	8-12	12"	3'	Heavy-Duty
T125	10-15	12"	3'	Heavy-Duty
T155	15-20	12"	4'	Heavy-Duty
T255	20-30	12"	4'	Heavy-Duty
T350	30-45	12"	5'	Heavy-Duty