
## **Mini Backhoe**







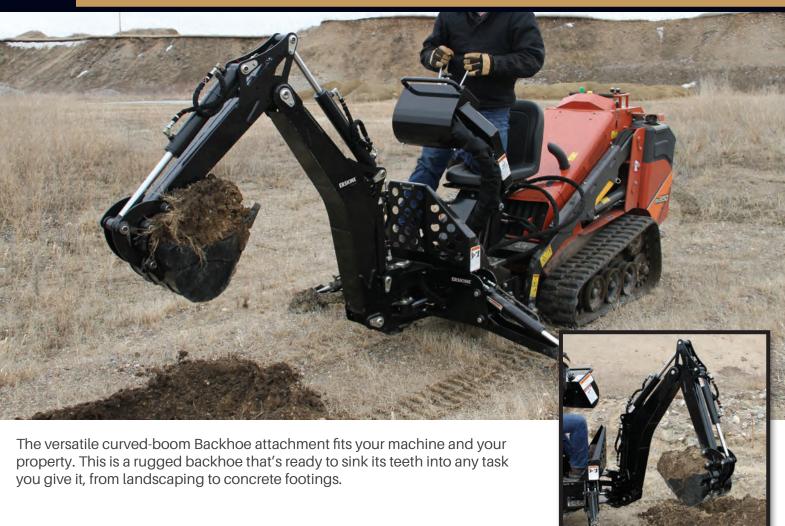

**OPERATING HEIGHT UP TO 91"** 




## **Mini Equipment**

YEARS ANNIVERSARY



Take a Picture of This QR Code With Your Smart Phone to See it in Action



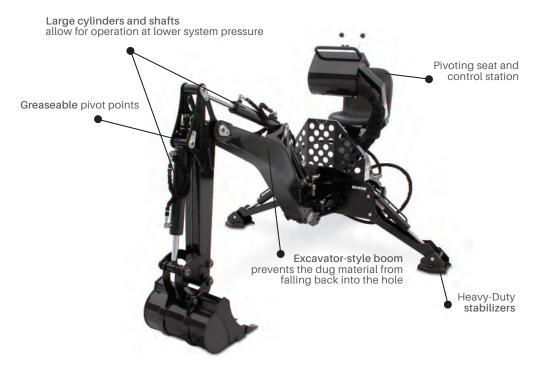

## **FEATURES & BENEFITS**

- · Operator seat swings for better visibility of work area
- Protected grease zerks Optimum performance with 5-7 GPM hydraulic system
- Dual cylinder swing provides maximum swinging power

## **SPECIFICATIONS/OPTIONS**

Model	BH780
Part Number	901072
Transport Height (fully retracted)	68"
Transport Width (stabilizers up)	36"
Transport Length	64"
Weight	835 lb.
Ground Clearance	7.5"
Digging Depth (2 ft. flat bottom)	78"
Overall Operating Height (fully raised)	91"
Loading Height (bucket at 60°)	63"
Reach from Swing Post	104"
Bucket Rotation	180°
Swing Arc	180°
Stabilizer Width (spread position)	81"
Stabilizer Width (transport)	36"
Stabilizer (below grade)	10"
Operating Pressure	2,250 psi
Dipper Stick Digging Force SAE	1,890 lb.
Bucket Digging Force SAE	3,450 lb.
Boom Lift Capacity	515 lb.
Hydraulic Volume Requirements	5-7 GPM
Main Boom Cylinder Diameter	2.25"
All Other Cylinder Diameter	Dipper 2.25", Rest 2"

- All main pivot points greaseable for easy maintenance.
  Full width replaceable bronze bushings on all wearable pivot points
- Boom & rotation lock for transport
- 9", 12" (3 teeth), 15", 18" (4 teeth), 24" (5 teeth) and 24" ditching bucket (no teeth)

Options
Tie Back Kit
Bucket 9", 12", 15", or 18"
Bucket 18" Ditching
Street Pads (pair)
Factory Installed Couplers
RH Support Valve (for Volvo, JCB, Case, New Holland, Gehl)

<sup>\*</sup> For more specification details please see our website www.erskineattachments.com

