Mini Trencher












Mini Equipment





Take a Picture of This QR Code With Your Smart Phone to See it in Action



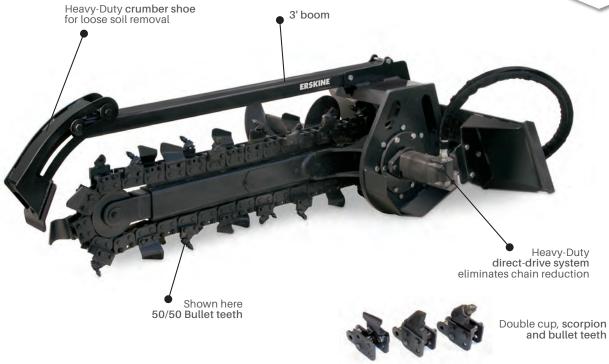

FEATURES & BENEFITS

- Direct-drive design
- 3' boom with crumber shoe that is removable
- 12" spoil auger that is removable
- Available in 4", 6", 8" widths

SPECIFICATIONS / OPTIONS

Model	Trencher Mini
Overall Width	40.38"
Overall Height	24"
Overall Length	79.38"
Trenching Depth @ 60°	38"
	2,000 - 3,000 psi
Rated Flow	7-16 GPM
Shaft Speed	85-185 RPM
Weight (3' x 6" Double Chain)	670 lb.

Mounting Kit Configurations

ASV/Terex (RC/PT30) Bobcat (MT-52/55, 463/S70) Toro / Vermeer / Boxer / Ditch Witch / Ramrod / Kanga / Cormidi Universal Mounting Plate (up to 1,000 lb. ROC and within rated flow) * For more specification details please see our website www.erskineattachments.com

