


Multi-Purpose Grapple





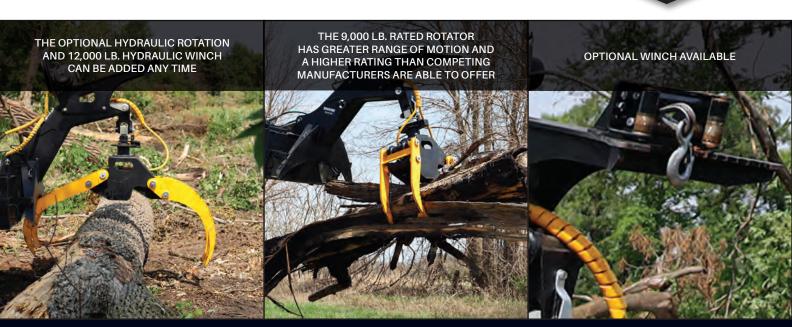


Grapple Attachments





Take a Picture of This QR Code With Your Smart Phone to See it in Action



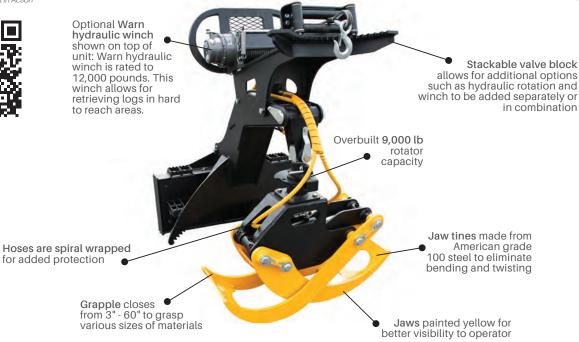

FEATURES & BENEFITS

- Includes skid steer mount and 3-point hitch Cat I and II
- · Two steel steps for traction
- · 3-inch bore cylinder
- Closes to less than 3 inches

- · Heavy-duty push bar
- · Optional hydraulic rotation
- · Optional winch

SPECIFICATIONS/OPTIONS

Model	48"	60"
Part Number	901315	901316
Mounting Plate	Universal, Cat I 3-Point, Cat II 3-Point	Universal, Cat I 3-Point, Cat II 3-Point
Hydraulic Pump Capacity Requirements	10 - 25 GPM	10 - 25 GPM
System Pressure	2,000 - 3,000 psi	2,000 - 3,000 psi
Maximum Jaw Opening Width	48""	60""
Minimum Jaw Closing Diameter	3""	3""
Boom and Rotator Capacity	9,000 lb.	9,000 lb.
Grapple Cylinder Bore	3""	3""
Winch Capacity (optional)	12,000 lb.	12,000 lb.
Winch Cable Length (actual / usable)	100 ′ / 85′	100'/85'
Weight (manual rotation)	1,179 lb.	1,233 lb.

Options

Hydraulic Rotation

Toplink Cylinder

Winch

Pistol Grip Control Harness (Applies to hydraulic model only)

Loader Specific Wire Harness (Applies to hydraulic model only)

Factory Installed Couplers



^{*} For more specification details please see our website www.erskineattachments.com