Power Angle Broom












Broom Equipment





Take a Picture of This QR Code With Your Smart Phone to See it in Action

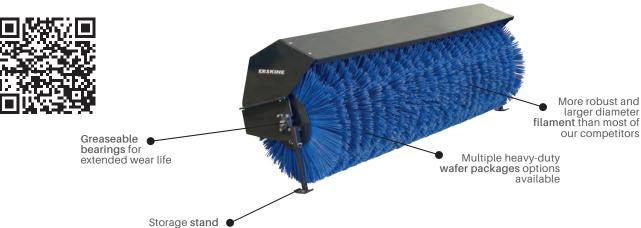

Optional: Wire Harness for hydraulic models with attachment controls. Fits Cat/ASV (8-pin) and John Deere/New Holland/CASE/Bobcat (14-pin).





Optional:
Pistol Grip Control Armess
is required if skid steer is
NOT equipped with
attachment control system.
Only needed when ordering
hydraulic angling model).

FEATURES & BENEFITS

- Exclusive Torsion Float Suspension eliminates springs. Assisting the operator in keeping consistent and correct bristle down pressure, reducing excessive wear on the bristles
- 25° right and left angle (manual or optional hydraulic)
- Greaseable bearings for longer wear life
- Hydraulic drive motor (no chains)

SPECIFICATIONS / OPTIONS

| _Model | 680 / 680X / 680XL | 840 / 840X / 840XL | 960 / 960X / 960XL |
|-------------------------|--------------------------------|--------------------------------|--------------------------------|
| Width | 68" | 84" | 96" |
| Width Fully Angled | 63" @ 25° | 77" @ 25° | 89" @ 25° |
| Broom Angling | Manual 25° / Hyd 25° / Hyd 25° | Manual 25° / Hyd 25° / Hyd 25° | Manual 25° / Hyd 25° / Hyd 25° |
| Drive System | Hydraulic Motor Direct-Drive | Hydraulic Motor Direct-Drive | Hydraulic Motor Direct-Drive |
| Skid Steer Flow Range | 13-24 GPM | 13-24 GPM | 13-24 GPM |
| Wafer Diameter | 32" | 32" | 32" |
| Wafer Sections (number) | 33 zig-zag | 40 zig-zag | 48 zig-zag |
| Wafter Options | Poly/Poly-Steel | Poly/Poly-Steel | Poly/Poly-Steel |
| Weight | 770 lb. | 879 lb. | 901 lb. |
| Reversible Valve Block | Included w/XL model | Included w/XL model | Included w/XL model |

Options

Pistol Grip Control Harness*

Loader Specific Wire Harness*

Factory Installed Couplers

*Applies to Hydraulic Models Only



^{*} For more specification details please see our website www.erskineattachments.com