




This is the ideal tool for general construction, truss installation, building erection, roofing/shingling, sign installation, on-the-farm, lighting erection, pole placement and much more! The Teleboom ensures accuracy and speed on all jobs- securely holding materials in place for projects with critical tolerances.



REACH WORKING HEIGHTS WITHOUT
ADDITIONAL SPECIALIZED EQUIPMENT



TELESCOPING BOOM
EXTENDS BEYOND 21 FEET

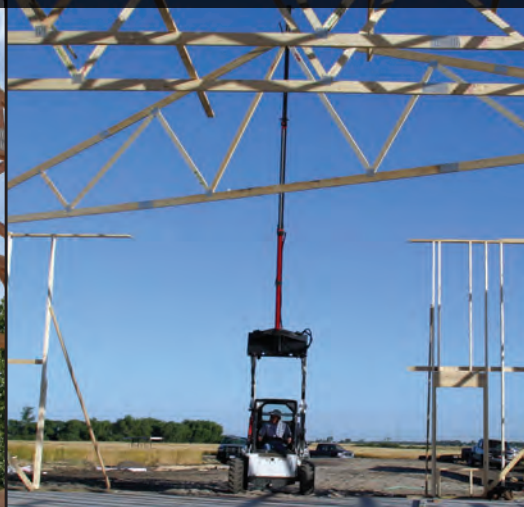


SECURELY TRANSPORT AND POSITION
MATERIALS AT THE JOB SITE





Take a Picture of This QR Code With
Your Smart Phone to See it In Action

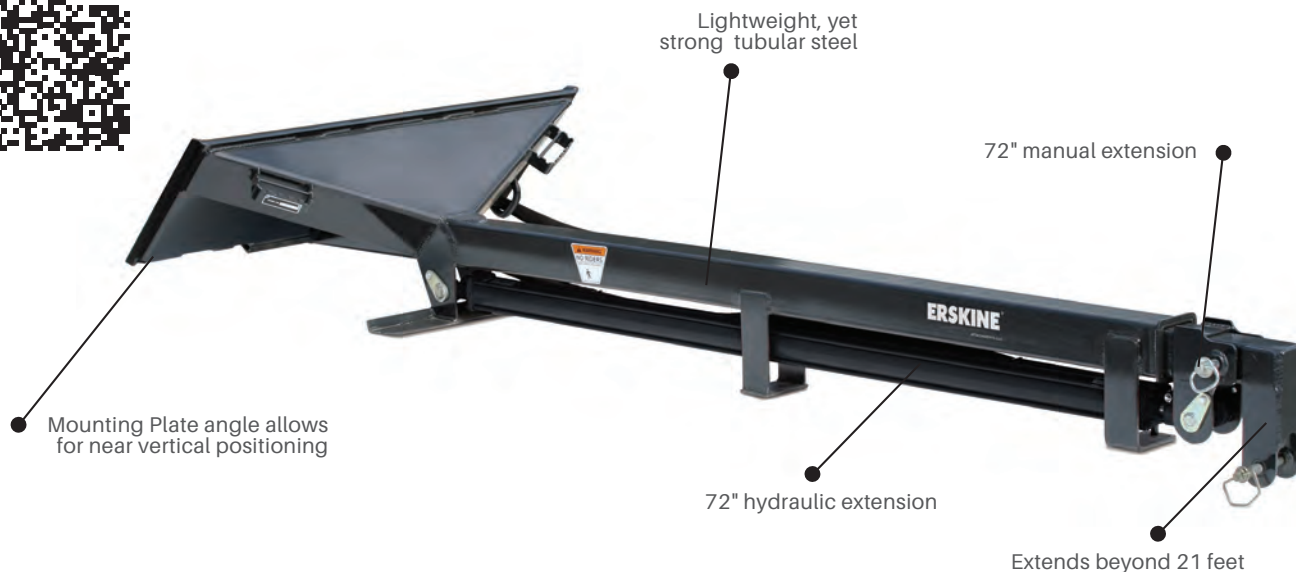

SKID STEER

FEATURES & BENEFITS

- 72" hydraulic stroke allows for adjustments from the comfort of your cab
- Strong, lightweight tubular steel
- Ideal for general construction, truss installation, and material handling

SPECIFICATIONS / OPTIONS

Model	Teleboom	Teleboom (Manual)
Part Number	900770	900771
Weight	521 lb.	425 lb.
Width	45.2"	45.2"
Height	18"	18"
Length Fully Contracted	112"	112"
Length Fully Extended	256"	256"
Rated Load (Fully Extended Horizontal)	350 lb.	350 lb.
Rated Load (Fully Contracted Horizontal)	750 lb.	750 lb.
Rated Load (Fully Contracted @ 75°)	1,000 lb.	1,000 lb.
Skid Steer Rated Operating Capacity	1,750 lb. (minimum)	1,750 lb. (minimum)
Hydraulic Cylinder	2.5" x 72"	N/A
Manual Boom Stroke	72" in 24" increments	72" in 24" increments

Options

Factory Installed Couplers

* For more specification details please see our website www.erskineattachments.com